

Product information | TECHNICAL DATA SHEET

ALIEN. Alkyd paint, solvent based, low pressure, satin paint.
250 ml, 6.7 Oz, 190 g

GENERAL DESCRIPTION

With its exceptional size and manageability Alien is Montana Colors' most experimental initiative, designed for graffiti, sign painting and high precision general decoration thanks to its low pressure and its valve. Made from modified alkyd enamel, with an incredibly fast drying time. Retains its color when exposed to the elements due to the high quality of its components. Gives surfaces an unbeatable glossiness.

FEATURES

- Low pressure.
- Fast drying.
- Good hardening.
- Excellent flexibility.
- Satin paint
- Strong resistance to scratching once the film is polymerized.
- Does not contain lead nor other heavy metals.
- Good covering capability.
- Durability satin appearance and color
- Easy to apply and repaint.
- Very good resistance to the sun and rain.
- Very good resistance to UV light (see chart).

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces: Remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use.
If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

| | |
|---|--|
| Base pressure: | Female valve |
| Propulseur: | Butane / propane / mix |
| Type de liant: | Modified alkyd |
| Color: | See chart |
| Shine 60° (ASTM D-1640 ISO 1517): | 30-50% satin |
| Dry to the touch (ASTM D-1640 ISO 1517): | 15' |
| Completely dry (ASTM D-1640 ISO 1517): | 24 hours |
| Thickness of dry layer (ASTM D-823 ISO 2808): | 15 microns/layer |
| Adherence (ASTM D-3359 ISO 2409) | 0 B |
| Theoretical yield (pintado en continuo): | 1,5 m ² for 250 ml |
| Thinner: | Mezcla MTN Solvent |
| Product life: | (Well Stored) 10 Years |
| Condition for application: | Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity 85% R.H.P |
| Heat resistance of paint: | 100°C |

* All of the adherence tests have been carried out on iron plates..

APPLICATIONS

Due to the product's features we recommend its use for painting all kinds of materials, whether it be for decoration, crafts, fine arts, and definitely, anywhere that requires a spray paint of the highest quality. May also be used for:

- Graffiti Art
- Fine arts
- Muralism
- Decorated
- DIY
- Plastics
- Industry
- Automotion

APPARENCE



LABEL



CAP SYSTEM




PACKAGING

Low pressure.
Nominal capacity 250 ml.
Heat resistance of packaging : <50°C
propellant: GLP – HC C₃-C₄

Box (6 units)
205 X 140 X 150 mm.



COLORS 23 Colors

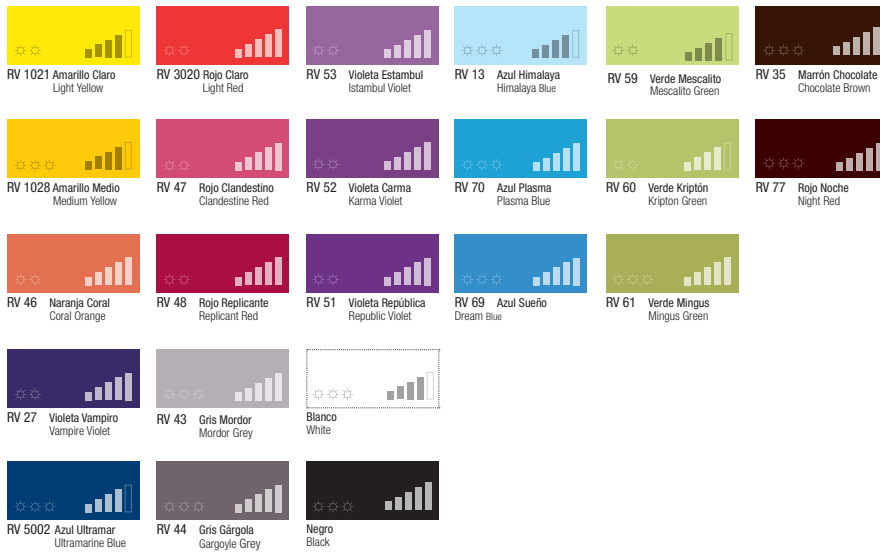

☆☆☆ UV Resistance / Resistencia UV ■■■■ Opacity level / Nivel de opacidad

CAUTION



Due to technical reasons this color chart might not reproduce the real colors. For accurate color reference see the spraycan's Donut. © Montana Colors 2016.