

## Product information | TECHNICAL DATA SHEET

**MEGA PLATA. Metallic silver colour..** Glossy paint, higher pressure, high covering and high powered.  
600 ml, 16.75 Oz, 475 g

### GENERAL DESCRIPTION

Mega Plata in a 600 ml format allows you to paint larger surfaces in less time. Acrylic gloss enamel, formulated with very high quality resins and leafing aluminium. With a very fast drying action, it leverages the power of the valve to expel the paint at high speed, obtaining a much wider span and a more fluid coat of paint. For a perfect finish and optimum exterior resistance.

### FEATURES

- Very fast drying..
- High covering capability.
- Good adhesion.
- Does not contain lead
- Light weather resistance.
- Aluminio de tipo leafing.
- No resists abrasion.

### APLICACIONES

Very suitable for painting any type of surface, giving a highly decorative metallic aspect. Very suitable for artworks.

- Graffiti
- Decorated
- Fine arts
- DIY
- Plastics
- Retouching metallic components

Paint with low exterior resistance and low resistance to abrasion, which leads to a loss of the metallic appearance. Do not apply coats of varnish or other paints due to the leafing aluminium, which migrates to the surface.

### INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute. Does not contains mixture balls inside
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush and prepare an anti-rust primer if considered necessary.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use, if te nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

### PHYSICAL PROPERTIES


Tipo Ligante:	Resina Acrilica
Color:	Plata brillante
Secado al tacto (ASTM D-1640 ISO 1517):	10'
Secado total (ASTM D-1640 ISO 1517):	30'
Espesor de capa seca (ASTM D-823 ISO 2808):	25 micras/capa (2 pasadas)
Adherencia (ASTM D-3359 ISO 2409):	3 B
Rendimiento teórico (pintado en continuo):	9,6 m <sup>2</sup> para aerosol 600 ml
Diluyente:	Mezcla aromática
Vida del producto:	(Almacenado correctamente) 10 Años
Condiciones de aplicación:	Tº ambiente mínima 8°C
	Tº superficie de 5°C a 50°C
	Humedad Máx. 85% R.H.P
Resistencia del pintado al calor:	150°C
Repintado	Después de 15'

\* Todas las pruebas de adherencia han sido realizadas sobre placas de hierro.

### APPARENCE

**DONUT**  
Indicates  
the paint color

**LID**  
Protects the valve  
and the nozzle.

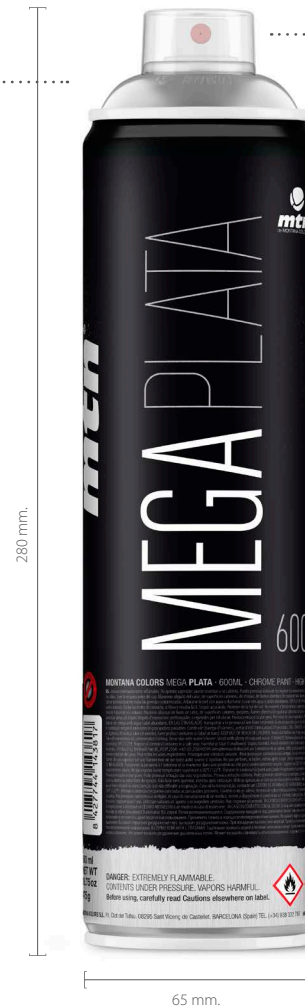

### ETIQUETA



### DIFUSOR



COLORES



ATENCIÓN



PACKAGING

Alta presión.  
Resistencia del envase al calor : <50°C  
Propelente: GLP – HC C3-C4  
Capacidad nominal: 750 ml.

**Caja (6 unidades)**  
200 X 280 X 140 mm.



Por razones técnicas esta carta de colores puede no mostrar los colores reales. Para una referencia más fiel véase el "Donut" del spray. © Montana Colors 2016-



Montana Colors, S.L. Pl. Clot del Tufau - 08295 Sant Vicenç de Castellet BARCELONA  
T: +34 938 332 787 - montana@montanacolors.com - www.montanacolors.com



Empresa certificada según norma de calidad ISO 9001:2000 ISO 14001:2004

Made in Europe.