

Product information | TECHNICAL DATA SHEET

VINYL PRIMER

400 ml, 10.72 Oz, 304 g. NET WT.

GENERAL DESCRIPTION

Resin-based primer that once painted over previously painted MTN vinyl paint, causes the MTN vinyl paint to become permanent, preventing and/or making it difficult to be removed from non-porous surfaces.

FEATURES

- Easy to apply and repaint.
- Avoids removability of vinyl paint.
- Applicable on most plastics and metals.

APPLICATIONS

For applications where a soft touch finish is desired (a characteristic of the MTN vinyl paint), and the vinyl paints removability is not required.

Good results are obtained on the majority of nonporous surfaces; metals and plastics, although different results are obtained depending on the nature of each surface: excellent results on iron, aluminum, ABS, PC, PVC, PET, and on PP, HDPE, and PA, the removability of the vinyl paint is moderately more difficult.

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. Clean surface with a degreaser or any other product specifically required for each particular surface. Rinse with water or solvent and let the surface dry.
- Apply a thin layer. Let the primer dry for approximately 5-10 minutes. Following, the vinyl paint may be applied to achieve the desired finish.
- Turn the aerosol upside down to clean out the valve after use. If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

Color:	Transparent
Shine:	Mate
Dry to the touch (ASTM D-1640 ISO 1517):	20'
Completely dry (ASTM D-1640 ISO 1517):	2 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 micras/layer
Theoretical yield (continuous painting):	2,5 m ² for 400 ml
Product life:	(Well Stored) 5 Years
Recoatable:	30'
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity 85% R.H.P
Heat resistance of paint:	100°C

Last date review: 26/04/2016.

CAUTION



APPEARANCE

DONUT


Indicates the paint color.

LID

Protects the valve and the nozzle.



LABEL

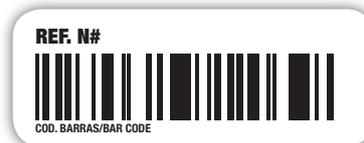

EX014V0201 Vinyl Primer

CAP SYSTEM



PACKAGING

Low pressure.
Nominal capacity 400 ml.
Heat resistance of packaging: <50°C
Propellant: DME

Box (6 units)
205 X 140 X 200 mm.

