

## Product information | TECHNICAL DATA SHEET

### ALUMINIUM RIMS PAINT

400 ml, 9.41 Oz, 267 g.

#### GENERAL DESCRIPTION

Thermoplastic fast drying acrylic enamel made with high quality resins, to give a new look to the car rims where a high quality aluminium finish is required.

#### FEATURES

- Very fast drying.
- Good hardening.
- Good Adhesion.
- Lead free.
- Brightness durability.
- Resistant to pressure washes.

#### APPLICATIONS

- Automotive Industry
- Cars

#### INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces, remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within ten minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use.  
If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

#### PHYSICAL PROPERTIES

Brinder type:	Thermoplastic acrylic
Color:	Aluminium
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Total drying (ASTM D-1640 ISO 1517):	30'
Coat thickness (ASTM D-823 ISO 2808):	15 µ/capa (2 coats)
Adherence (ASTM D-3359 ISO 2409):	2 B
Theoretical yield (continuous painting):	2 m <sup>2</sup>
Thinner:	Acetato Butilo
Product life:	(Well Stored) 5 Years
Recoating:	After 10'
Painted resistance to heat:	150°C
Application conditions:	T° environment min. 8°C
	T° surface min. 5-50°C
	Humidity Max. 85% R.H.P


\* Adherence tests were performed on steel.



#### IMAGE



#### LABEL

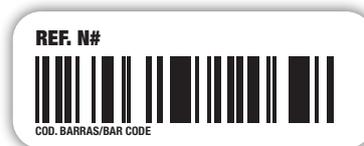

Aluminio Llantas / Aluminium rim paint  
EX014PR0120

#### CAP SYSTEM



#### PACKAGING

Nominal Capacity 400 ml  
Container heat resistance: <50°C  
Propellant:: GLP C3-C4  
VOC's: 617g/L

Box (6 units)  
205 X 140 X 200 mm.

