

## Product information | TECHNICAL DATA SHEET

**NITRO 2G COLORS. Solid Color. Matt paint and high pressure.**  
500 ml, 14 Oz, 390 g.

### GENERAL DESCRIPTION

The Nitro 2G technology was designed to produce very fast-drying results, available in a range of high coverage colors. These paints are formulated with alkyd resins and matt finish pigments.

### FEATURES

- High pressure.
- Very fast drying.
- Does not contain lead nor other heavy metals.
- Hardens well.
- Excellent flexibility.
- Excellent coverage.
- Great pigment durability.
- Strong resistance to abrasion once the film is polymerized.
- Easy to apply and repaint.
- Excellent resistance to the sun and rain.
- Very good resistance to UV light (see chart).

### APPLICATIONS

Due to the characteristics of this product, we recommend using it for final finishes. Since it is a high quality paint, it may also be used for an endless amount of jobs where its qualities are required.

- Industry
- Crafts
- Touch-ups
- DIY
- Road works
- Sign painting

### INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within ten minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use, if te nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

### PHYSICAL PROPERTIES

Color:	See chart
Brillo 60° (ASTM D-523 ISO 2813):	<10%
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely dry (ASTM D-1640 ISO 1517):	30'
Thickness of dry layer (ASTM D-823 ISO 2808):	20 µ/lyers
Theoretical yield (continuous painting):	2,8 m²
Thinner:	Ethyl Acetate
Product life:	>5 years
Second coat:	After 10'
Heat resistance of paint:	100°C
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity . 85% R.H.P

\* All of the adherence tests have been carried out on steel plates.

### APPEARANCE



### COLORS

<b>Amarillo Claro / Light Yellow</b> EX015A1021M	<b>Azul Claro / Light Blue</b> EX015A0008M
<b>Naranja Pastel / Orange</b> EX015A2004M	<b>Azul Marino / Marine Blue</b> EX015A5013M
<b>Rojo Vivo/ Intense Red</b> EX015A3001M	<b>Violeta Vampiro / Vampire Violet</b> EX015A0027M
<b>Verde Guacamole / Guacamole Green</b> EX015A0034M	<b>Blanco / White</b> EX015A9010M

### LABEL



### CAP SYSTEM



### PACKAGING

Nominal capacity 500 ml.  
Heat resistance of packaging: <50°C  
Propellant: GLP C3-C4  
Pressure: High pressure  
Valve: Female

**Box (6 units)**  
205 X 140 X 200 mm.



## Product information | TECHNICAL DATA SHEET

**NITRO 2G COLORS - Silver. Metallic color. Matt paint and high pressure.**  
500 ml, 14 Oz, 390 g.

### GENERAL DESCRIPTION

Very fast drying acrylic enamel, formulated with extremely high quality resins and metallic, inorganic pigments.

### FEATURES

- High pressure.
- Very fast drying.
- Excellent adherence.
- Long-lasting gloss finish on interiors.
- Does not contain lead or other heavy metals.
- Easy to apply and repaint.
- Since it is a "leafing" pigment paint, it does not resist weathering or mechanical wear and abrasion for a long period of time.

### INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use.  
If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.


### PHYSICAL PROPERTIES

High pressure:	Polyvalent female valve
Propellant:	Butane / Propane / Mix
Binding type:	Hydrocarbon
Color:	Silver
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely dry (ASTM D-1640 ISO 1517):	2 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 micras/layer
Theoretical yield (continuous painting):	3,1 m <sup>2</sup>
Thinner:	Aromatic mixture
Vida del producto:	(Well Stored) 5 years
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity . 85% R.H.P
Heat resistance of paint:	150° C

### APPEARANCE



### LABEL

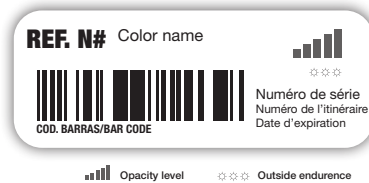

### CAP SYSTEM



### COLOR



### PACKAGING

Nominal capacity 500 ml.  
Heat resistance of packaging: <50°C  
Propellant: GLP C3-C4  
Pressure: High pressure  
Valve: Female

**Box (6 units)**  
205 X 140 X 200 mm.



## Product information | TECHNICAL DATA SHEET

**NITRO 2G - Black.** Solid Color. Matt paint and high pressure and Silver Killer®.  
500 ml, 14 Oz, 390 g.

### GENERAL DESCRIPTION

Matt black, high coverage, solvent-based acrylic paint of exceptional quality, specially designed for use on silver (Silver Killer®). Due to its characteristics it may also be used as a finishing coat.

### FEATURES

- High pressure.
- Very fast drying.
- Easy to apply and repaint.
- Hardens after 2 hours
- Does not contain lead nor other heavy metals.
- Excellent covering capability.
- Silver Killer® covers metallic "leafing" paints.
- Silky matt black finish.

### APPLICATIONS

Due to the characteristics of this product we recommend using it for final finishes. Since it is a high quality paint, it may also be used for an endless amount of jobs where its qualities are required.

- Graffiti
- Industry
- DIY
- Muralismo
- Crafts/hobby

### INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use.  
If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

### PHYSICAL PROPERTIES

High pressure:	Female valve
Propellant:	GLP C3-C4
Color:	Matt Black
Shine:	<10%
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely dry (ASTM D-1640 ISO 1517):	20'
Thickness of dry layer (ASTM D-823 ISO 2808):	20 micras/layer
Adherence (ASTM D-3359 ISO 2409):	3B
Theoretical yield (continuous painting):	2,8 m²
Thinner:	Ethyl acetate
Product life:	>5 years
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity . 85% R.H.P
Heat resistance of paint:	100°C
Repintado:	After 10'

\* All of the adherence tests have been carried out on iron plates.

### APPEARANCE



### LABEL



### CAP SYSTEM



### COLOR



### EMBALLAGE

Capacité nominale 500 ml.  
Résistance du contenant à la chaleur: <50°C  
Propulseur: GLP C3-C4.  
Pression: Haute pression.  
Valve: Femelle.

Boîte (6 unités)  
205 X 140 X 200 mm.

