

Product information | TECHNICAL DATA SHEET

FORGING EFFECT PAINT

400 ml, 12 Oz, 345 g

GENERAL DESCRIPTION

Synthetic anti-corrosion enamel formulated with micaceous iron oxide metallic pigments conferring a ferrous appearance to the painted feature.

FEATURES

- Very fast drying.
- Good anti-corrosion power.
- Protects the metallic foundation.
- High resistance to outdoor exposure.
- Does not contain lead or other heavy metals.
- Good covering power.
- Excellent welding properties.
- Very good adherence.
- Rough finish appearance.

APPLICATIONS

Due to the characteristics of the product, we recommend its use for touch-up and painting materials of all kinds.

- Iron
- Welding joints
- Sources and all type of urban furniture.
- Lamps
- Metallic fences
- Structural steel

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces, remove rust with a wire brush.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use. If the nozzle becomes blocked replace it with a new one.
- Due to the density of the product, it's important to keep shaking the can during application in order to achieve a more uniform finish.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Use it in well ventilated areas.
- Request safety data sheets.

PHYSICAL PROPERTIES



Brinder type:	Modify synthetic
Color:	Black - Grey
Brightness:	<10%
Dry to the touch (ASTM D-1640 ISO 1517):	20'
Total drying (ASTM D-1640 ISO 1517):	24h
Coat thickness (ASTM D-823 ISO 2808):	20 µ / layer
Adherence (ASTM D-3359 ISO 2409):	3B
Salt mist test:	300 h
Theoretical Coverage (continuous painting):	3 m ²
Thinner:	Mixture
Product life:	(Well Stored) 5 years
Recoating:	Between 25' and 2 hours. After 24h
Painted resistance to heat:	100°C
Application conditions:	T° environment min 8°C T° surface min 5-50°C Humidity max 85% R.H.P

* Adherence tests were performed on steel.

APPEARANCE



LABEL

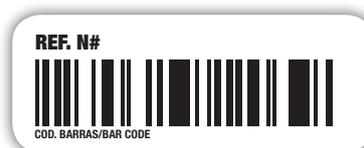

CAP SYSTEM



PACKAGING

Nominal capacity 400 ml.
Heat resistance of packaging: <50°C
Propellant: DME

Box (6 units)
205 X 140 X 200 mm.



CAUTION

