

Product information | TECHNICAL DATA SHEET

T.N.T Spray Solidario. Mate paint, high pressure, high coverage and fast drying.
400 ml, 11 Oz, 300 g.

GENERAL DESCRIPTION

Matt alkyd enamel, great drying speed, obtaining very good color retention outdoors, and a perfect finish.

FEATURES

- High pressure
- Fast drying.
- Good hardening.
- Excellent flexibility.
- Strong resistance to scratching once the film is polymerized.
- Does not contain lead nor other heavy metals.
- Good covering capability.
- Color durability.
- Easy to apply and repaint.
- Good resistance to the elements.
- Very good resistance to UV light (see chart).

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces: Remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use. If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

High pressure:	Polyvalent female valve
Propellant:	Butano / Propano / Mix
Branding type:	Modified alkyd
Color:	See chart
Shine 60° (ASTM D-523 ISO 2813):	15-25% matt
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely of dry layer (ASTM D-1640 ISO 1517):	24 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 micras/layer
Adherence (ASTM D-3359 ISO 2409):	0 B
Theoretical yeled (pintado en continuo):	2 m ² for 400 ml
Diluyente:	Mezcla MTN Solvent
Product life:	>2 years
Conduction for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity . 85% R.H.P
Heat resistance of paint:	100°C

* All of the adherence tests have been carried out on iron plates.

APPLICATIONS

Due to the product's features we recommend that it be used for touch-ups on all kinds of materials. Whether for domestic use, craftwork, fine arts, and in short, anywhere that requires a spray paint of the highest quality.

- Graffiti
- Fine arts
- Gardening
- Sign painting

APPARENCE




PACKAGING

Low pressure.
Nominal capacity 400 ml.
Heat resistance of packaging: <50°C
Propellant: GLP – HC C₃-C₄

BOX (7 units)
275 X 175 X 160 mm.



COLOR 7 Color

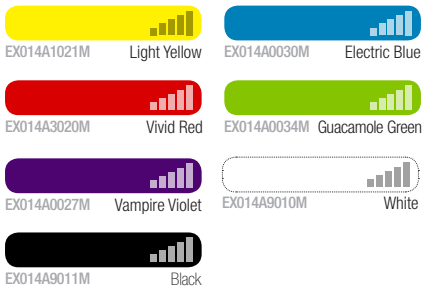

CAUTION



LABEL



CAP SYSTEM



Fat Pink Cap
Fino - Thin

Due to technical reasons this color chart might not reproduce the real colors. For accurate color reference see the spraycan's Donut. © Montana Colors 2019.