

Product information | TECHNICAL DATA SHEET

HOME APPLIANCE PAINT - R 9016

400 ml, 10.04 Oz, 313 g

GENERAL DESCRIPTION

Paint composed of high quality hydroxyl acrylic resins that are formulated with titanium dioxide and additives to obtain a perfect, bright finish. Ideal for painting household appliances.

FEATURES

- Very fast drying.
- Good hardening.
- Highly resistant to scratching.
- Excellent adherence.
- Does not contain Lead.
- Good covering power.
- Brightness and colour durability.
- Non yellowing.
- Easy to apply and recoating.
- Resistant to UV rays.

APPLICATIONS

- Washing machine paint
- Refrigerator paint
- DIY and gardening repairs
- Extractor fan paint
- Dishwasher paint
- Painted outside ovens and microwave

INSTRUCTIONS FOR USE

- Unplug the appliance before painting.
- Clean, degrease and sand the rust from the surface that is to be painted. After that, apply a white anti rust primer as a base.
- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Thoroughly clean and degrease the object to be painted. Remove corrosion using a wire brush. On plastics and polyesters apply a anchor layer.
- Apply thin coats for best results, always thin layers is better than one thick, paintable after 10 minutes with the same paint.
- Disconnect the electrical appliance before painting.
- Use in well ventilated areas.
- Request safety data sheets.

PHYSICAL PROPERTIES

Brinder type:	Acrylic
Color:	Characteristic white
Brightness (60°):	>80%
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Total drying (ASTM D-1640 ISO 1517):	20'
Thickness of dry layer (ASTM D-823 ISO 2808):	15 µ/layer
Adherence (ASTM D-3359 ISO 2409):	4B
Theoretical yield (pintado en continuo):	2 m ²
Thinner:	Butyl Acetate
Product life:	(Well Stored) 5 Years
Recoating:	After 10'
Painted resistance to heat:	120°C
Application conditions:	Ambient temperature 8°C
	Surface temperature 5-50°C
	Humidity Max. 85% R.H.P


* Adherence tests were performed on steel.

280421

IMAGE



LABEL

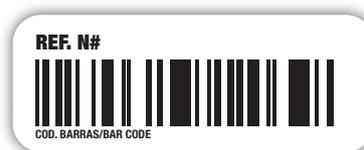

Blanco / White
EX014PRO905

CAP SYSTEM



PACKAGING

Nominal capacity 400 ml.
Heat resistance of packaging: <50°C
Propellant: DME

Box (6 units)
205 X 140 X 200 mm.

